# ZWP 28

## Robust design with granite machine base for highest accuracy

The high-quality ZWP 28 is characterized by an extremely stable construction and thus enables measurements of highest accuracy.

An exact height adjustment at the steady centre attachment is done by cranks. The very flexible construction makes adjustments as well as the assembly of many accessories possible without any problems. Optionally, the ZWP 28 is also available in a flying version- i.e. without accessories for the upper tip.

| Technical Data | |
|---|---|
| Centre distance<br>with special mounting | 38 - 128 mm<br>≥ 31 mm between tips<br>≥ 26 mm single end mounting |
| Max. specimen diameter | 180 mm |
| Height adjustable | yes |
| Steady centre attachment on both sides | optional |
| Measuring force setting | 2,5-19 N |

**FRENCO GmbH**
Gear + Spline Technology
Jakob-Baier-Str. 3 • D - 90518 Altdorf
**www.frenco.com**

pure perfection
FRENCO

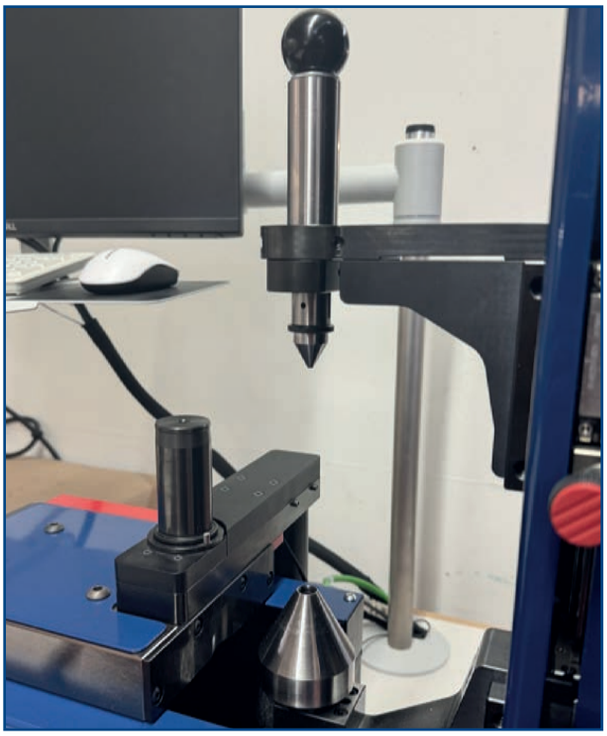

## Optional accessories

**Mounting for internal gear inspection, for mounting of master gear**

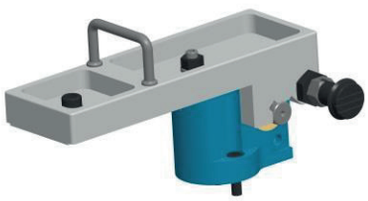

**Fixture for worms, Mounting between tips**

$s_{MAX}$ = 150 mm  w = ±45°
a = 40 mm

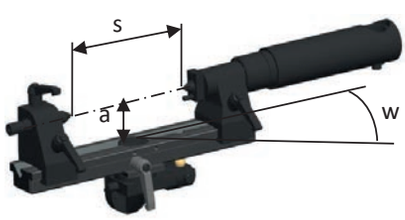


**Fixture for worms, mounting trough prisms (bearing seat as reference)**

$s_{MAX}$ = 250 mm
a= 40 mm

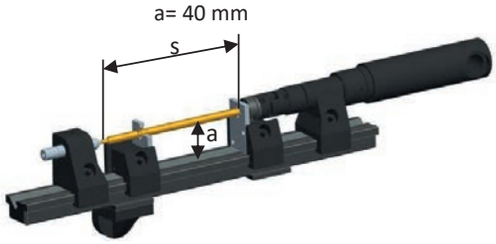


**Adapter for small centre distances: Pin arbour attachment**



pin
$e_{MIN}$ = 16 mm



pin
$e_{MIN}$ = 22 mm

**FRENCO GmbH**
Gear + Spline Technology
Jakob-Baier-Str. 3 • D - 90518 Altdorf
**www.frenco.com**

pure perfection
FRENCO